



Updating the Modbus option for the iMAG4700/AG3000 products requires updating the meter firmware to the new 4.05 firmware release and replacing the modbus option board with a board that is programmed with the 2.02 firmware.

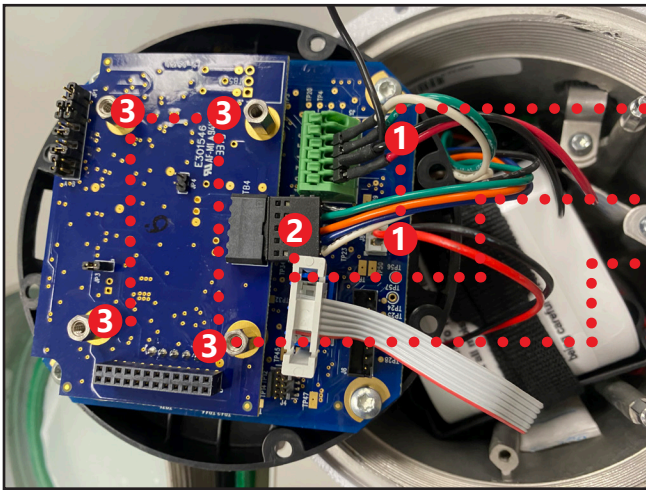


••••• Step 1 Open the meter and disconnect the battery and remove the wires from the green connector.

••••• Step 2 Remove the Modbus option board connector.

••••• Step 3 Remove the Modbus option board.
Note: The board will require either a T-10 torx tool or a 3/16" hex socket depending on options that have been ordered.

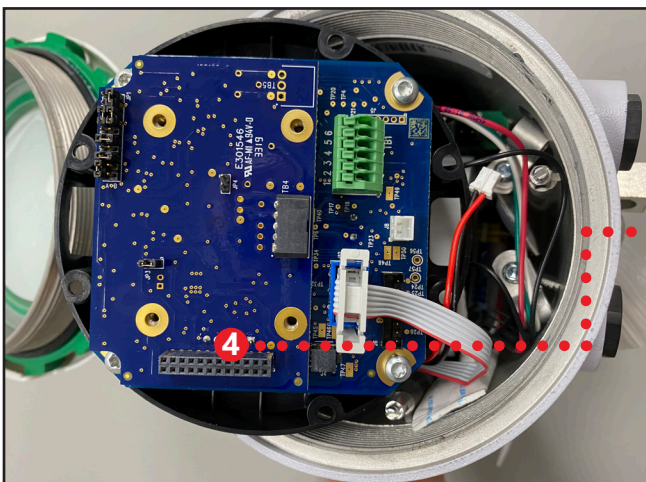

••••• Step 4 Gently pull on the black connector to remove the Modbus option board.

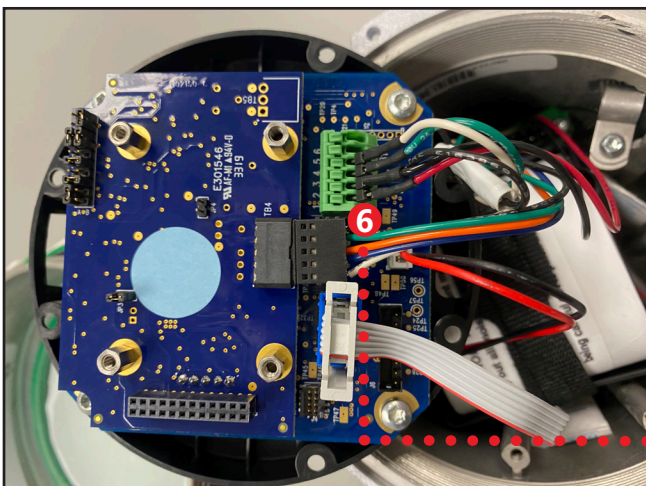

Step 5 Updating the meter firmware is completed following the directions and hardware in Seametrics technical bulletin "Installing iMAG4700/AG3000 firmware up date", available on our website: seametrics.com. Contact your distributor with questions or to order the programming kit

Step 6 After successful reprogramming of the meter firmware, install the new Modbus board.

Note: Do not reconnect meter power until all other connectors have been installed.

••••• Be sure to orient the connector so that the red wire is installed in terminal 1.