

Aqua4PlusLite


CONTROL SOFTWARE FOR SEAMETRICS SMART SENSORS




APPLICATIONS

- Multi-layered control program for most popular Seametrics Smart Sensors
- Access multiple sensors, each with multiple test sessions
- Control a network of sensors
- View sensor status and monitor real-time data
- Create flexible and powerful test sequences
- Display data in tabular or graphic format
- Easy export into spreadsheets and databases

Access several sensors, each with multiple test files

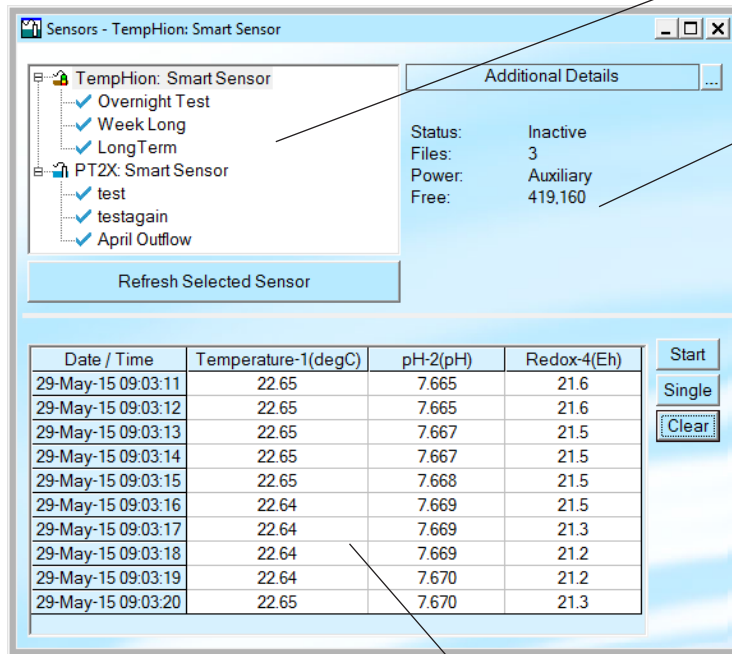

View sensor status

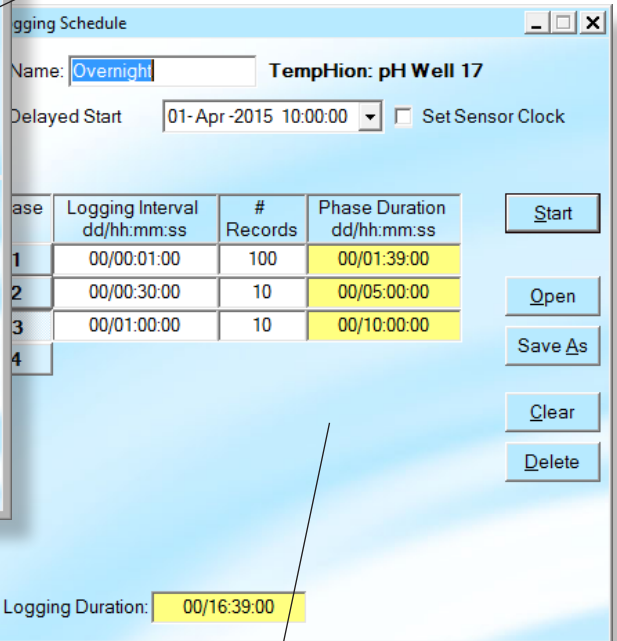

Contact Your Supplier

Monitor real time data

Create flexible and powerful test sequences



System Requirements

- Desktop or laptop computer running WinXP(SP3) or higher
- 20 MB free hard drive space
- USB port for installing the program and for communicating with sensors. (The program can also be installed over the Internet.)
- NOTE: The software may not work reliably on ultra-high definition (4K) laptops and monitors.

Features

- Controls PT2X, CT2X, and TempHion Smart Sensors
- USB connectivity
- Basic logging options
- Delayed start feature to coordinate data collection
- Easy-to-use calibration utility
- Barometric compensation utility
- Export to .csv
- Export to .xls (Windows XP, 7, 8, and 8.1 only)

File Display - QuickTest.a4d			
Sensor SN	Sensor Type	Sensor Name	File
21304156	PT2X	Pressure Well 17	QuickTest
		Records	37
Sensor Range		Temperature(degC)	Pressure(psi)
Minimum		24.13	8.279
Maximum		24.31	8.715
Mean		24.24	8.426
Variance		0.002	0.0104
Std Deviation		0.041	0.1018
Field Cal Date		1-Apr-15 09:35	1-Apr-15 08:30
Rec#	Date/Time	Temperature(degC)	Pressure(psi)
1	1-Apr-15 09:35:33	24.13	8.715
2	1-Apr-15 09:35:34	24.13	8.664
3	1-Apr-15 09:35:35	24.19	8.602
4	1-Apr-15 09:35:36	24.19	8.539
5	1-Apr-15 09:35:37	24.19	8.485
6	1-Apr-15 09:35:38	24.19	8.430
7	1-Apr-15 09:35:39	24.25	8.379
8	1-Apr-15 09:35:40	24.19	8.330
9	1-Apr-15 09:35:41	24.25	8.289

Display data in tabular or graphic format

