


## Technical Bulletin AG3000/iMAG4700 Flanged Magmeter Security Bolt Installation

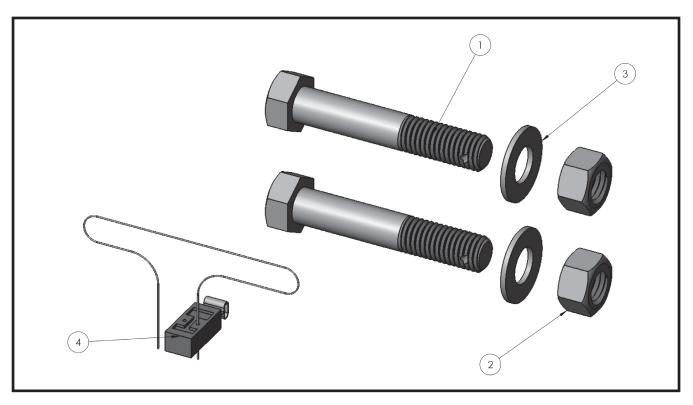

Your security bolt kit comes with the following (shown above):

- 1) Security Bolt (Qty 2)
- 2) Steel Nut (Qty 2)
- 3) Washer (Qty 2)
- 4) Security Seal with 24" of wire


## Kit Numbers:


103962-01 Security Bolt Kit 3" & 4" Flanged Meters 103962-02 Security Bolt Kit 6" & 8" Flanged Meters 103962-03 Security Bolt Kit 10" & 12" Flanged Meters



## Technical Bulletin AG3000/iMAG4700 Flanged Magmeter Security Bolt Installation

- 1. Remove two of the standard bolts. (A)
- 2. Install one of the security bolts for each of the two standard bolts that have been removed. The security bolts will have a cross drilled hole at the threaded end. Make sure to use the included washers. (B)
- 3. The bolts are usually placed in two adjoining holes but can be installed in any two holes as long as the included 24" security wire reaches.
- 4. Install security wire and security clip. (C)

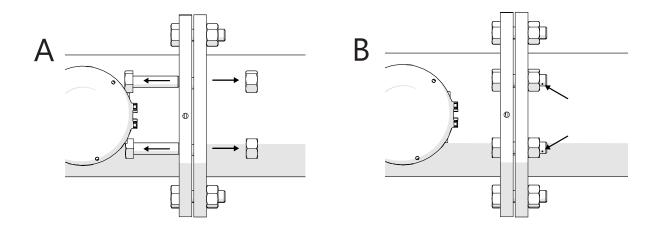



Seametrics Incorporated • 19026 72nd Avenue South • Kent, Washington 98032 • USA (P) 253.872.0284 • (F) 253.872.0285 • 1.800.975.8153 • www.seametrics.com